


KITO® MANUAL LEVER HOISTS



SPECIFICATIONS AND DIMENSIONS:

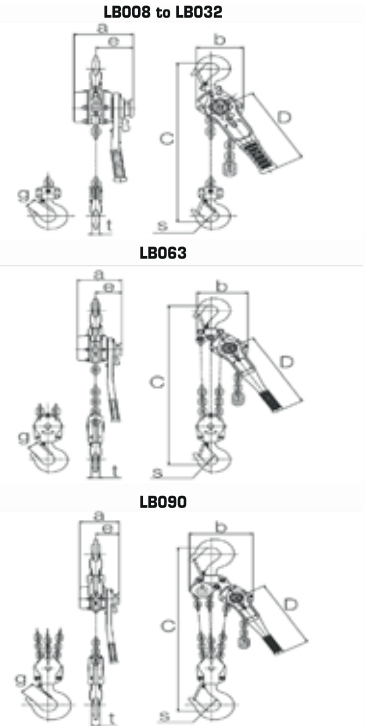

RATED LOAD (W.L.L)	(t)	0.8	1	1.6	2.5	3.2	6.3	9
PRODUCT CODE		LB008	LB010	LB016	LB025	LB032	LB063	LB090
STANDARD LIFT	(m)	1.5	1.5	1.5	1.5	1.5	1.5	1.5
HAND-PULL TO LIFT FULL LOAD	(N) [kg]	284 [29]	353 [36]	333 [34]	363 [37]	363 [37]	372 [38]	382 [39]
LOAD CHAIN DIAMETER X CHAIN FALL	(mm)	5.6 x 1	5.6 x 1	7.1 x 1	8.8 x 1	10 x 1	10 x 2	10 x 3
TEST LOAD	(kg)	1200	1500	2400	3800	4800	7900	11300
MASS (NET WEIGHT) *	(kg)	5.7	5.9	8	11.2	15	26	40
SHIPPING WEIGHT (AP PROX.)	(kg)	6	6.2	8.3	11.6	16	27	42
WEIGHT FOR ADDITIONAL ONE METER OF LIFT	(kg)	0.7	0.7	1.1	1.7	23	4.7	7
DIMENSIONS (mm)	a	144	144	159	173	190	190	190
	b	119	119	126	150	159	217	304
	c	280	300	335	375	395	540	680
	d	245	245	265	265	415	415	415
	e	97	97	100	102	112	112	112
	g	23.5	29	32	36.5	39	50	72.5
	s	35.5	42.5	42.5	47	50	60	85

- The load-lifting height can be set according to the user or users application. However, no addition to the chain to increase the length is possible as Kito chains are heat treated.
When ordering, specify the length of chain in advance or consult your local Kito distributor.

- Overload limiters available upon request.

* The mass (Net weight) is for the standard load-lifting height.