


## CONSTRUCTION HANDLING EQUIPMENT

Generally in Accordance with EN 13155

### Palletfork - Standard ISO Pallet



MODEL	WORK LOAD LIMIT (ton)	ADJUST-ABLE FORK WIDTH (mm) (n)	HOOK HEIGHT (mm) (h1)	EFFECTIVE HEIGHT (mm) (h)	FORK LENGTH (mm) (L)	FORK CROSS (D)	OVERALL SIZE (mm)	NET WEIGHT (kg)	DESIGN STANDARD
CY20	2	400 - 900	1655 - 2355	1300 - 2000	1000	120 x 40	1140 x 920 x 1775	220	EN1355
CY30	3	450 - 900	1720 - 2420	1300 - 2000	1000	120 x 50	1140 x 920 x 1850	280	EN1355

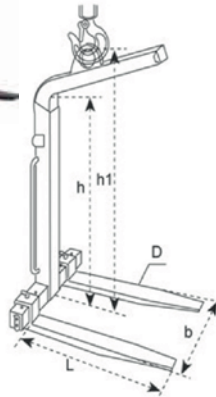

Features:

- Gives any crane pallet handling capability quickly and safely
- Automatic load levelling
- Service free
- Special designs on request - eg. double, extra height etc.
- Standard configuration as above

### "T" Hook - Storm Water Pipe Handling and Installation



PRODUCT CODE	MODEL	WLL (kg)
MA CS THOOK250 ASSY	T250	WLL - 2500kg
MA CS THOOK500 ASSY	T500	WLL - 5000kg

- Super quick pipe engagement/ disengagement from the outside
- Supplied complete with 1.5m adjustable chain sling

NOTE: No side [angular] lifting permitted.

### Manhole Installation Clamp Set



PRODUCT CODE	MODEL	WLL (kg) Thickness Range
MA CS MANHOLERING	T180	1 800kg - 60-120mm
-	T350	3 500kg - 120-180mm

- The only way to handle/ install manhole sections  
Quick to engage and disengage with complete safety