



ROTATING TROLLEYS - RL

GKS-PERFEKT rotating trolleys are available for loads from 1 t to 6 t. The special bearings in our rotating trolleys allow easy moving and rotating 360° around its own axis. Use a set of 3 or 4 rotating trolleys or even more simultaneously, depending on the machine's support points, load distribution and floor conditions. Depending on the situation a combination of rotating trolleys with L/F trolleys is possible.

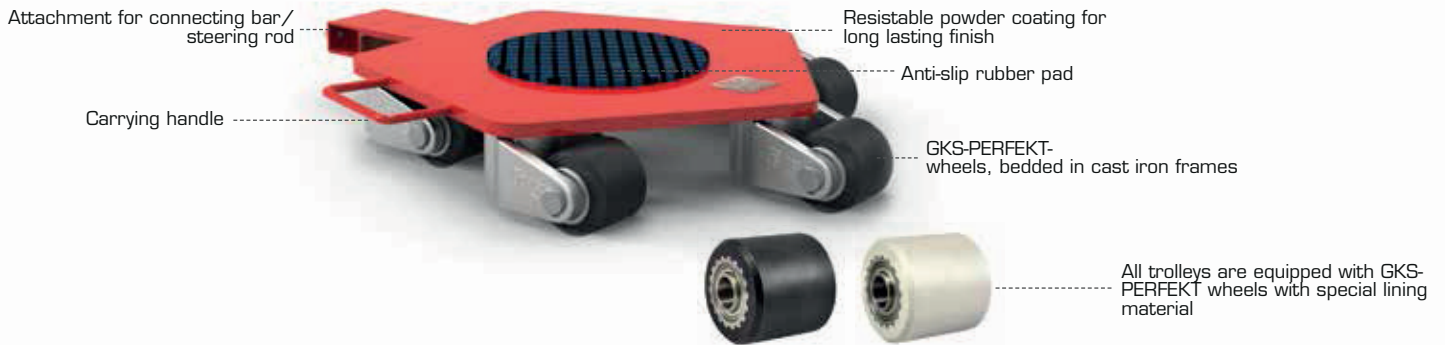

Rotating Trolleys RL - For heavy loads up to 6 tons

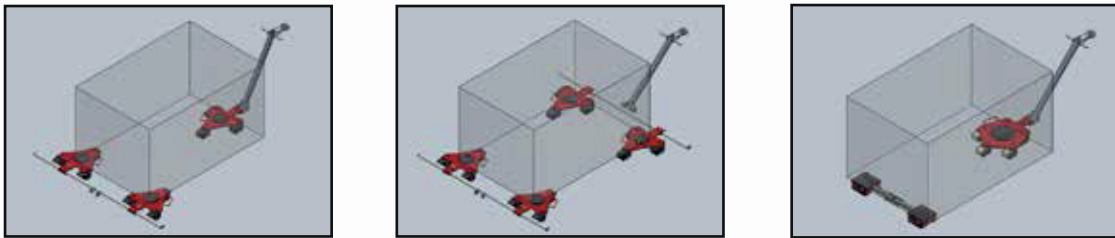

- RL trolleys with the same loading height can be combined for 3 or 4-point support
- Options: connecting bar and steering rod
- RL trolleys can be equipped with GKS-ALPERFEKT®PUR wheels for sensitive floors
- Depending on the load distribution, it's possible to combine different RL models, but with the same loading height
- Rotating trolleys can be combined with F or Tandem TL trolleys with same loading height

TECHNICAL DATA	RL1	RL2	RL4	RL6
NUMBER OF WHEELS/DIMENSIONS	3 Ø 75 x 66 mm	3 Ø 85 x 85 mm	5 Ø 85 x 85 mm	5 Ø 85 x 85 mm
LOADING HEIGHT	100 mm	110 mm	110 mm	118mm
SIZE OF RUBBER PAD Ø	170 mm	170 mm	250 mm	250 mm
OVERALL DIMENSIONS (L x W x H)	376 x 379 x 100 mm	685 x 515 x 110 mm	760 x 560 x 110 mm	760 x 560 x 118 mm
TARE WEIGHT IN KG	15 kg	30 kg	50 kg	60 kg
LOAD CAPACITY	10 kN (1 t)	20 kN (2 t)	40 kN (4 t)	60 kN (6 t)