


## CROSBY® PLATINUM LINE

# Grade 80 Welded Master Links



EN1677-4

### A-344 WELDED MASTER LINK




SIZE (mm)	A-344 STOCK NO.	WEIGHT EACH (kg)	SINGLE LEG CHAIN SLING (mm)	DOUBLE LEG CHAIN SLING (mm)	W.L.L (t)*	DIMENSIONS (mm)				ENGINEERED FLAT SIZE FOR S-1325A (mm)
						A	B	C	G	
12	1256862	.30	6-7	6	1.6	12.0	60.0	120	6.50	6
13	1256932	.36	8	7	2.5	13.0	60.0	120	6.50	7-8
17	1257002	.86	10	8	4.1	17.0	90.0	160	8.50	10
19	1257072	1.08	13	10	6.7	19.0	90.0	160	8.50	10
20	1257082	1.17	-	-	6.7	20.0	80.0	150	-	-
22	1257214	1.59	-	-	8.5	22.0	90.0	170	-	-
22	1257212	1.63	16	13	8.5	22.0	100	180	10.5	13
22	1257215	2.39	-	-	6.3	22.0	145	275	-	-
25	1257282	2.43	18-19	16	11.5	25.0	115	210	13.5	16
25	1257302	2.31	-	-	11.5	25.0	100	190	-	-
25	1257332	3.35	-	-	8.9	25.0	145	275	-	-
28	1257352	3.22	-	-	12.9	28.0	110	210	-	-
28	1257382	3.91	20	-	13.0	28.0	145	275	13.5	16
31	1257422	4.86	22	18-19	17.0	31.0	145	275	15.5	-
32	1257442	5.30	-	-	17.0	32.0	140	270	-	-
36	1257492	6.87	25-26	20-22	24.0	36.0	155	285	-	-
38	1257502	7.63	-	-	31.5	38.0	140	270	-	-
40	1257532	8.96	28	-	28.1	40.0	160	300	-	-
45	1257569	10.31	-	-	32.0	45.0	140	250	-	-
45	1257564	12.70	-	-	38.3	45.0	170	320	-	-
45	1257562	12.82	32	25-26	38.3	45.0	180	340	-	-
50	1257582	17.60	-	-	45.0	50.0	200	380	-	-
51	1257632	18.72	-	32	45.0	51.0	215	390	-	-
57†	1257652	24.5	-	-	65.3	57.0	203	406	-	-

\* Chain slings require that the Minimum Ultimate Load be 4 times the Working Load Limit.

† Forged

### A-347 WELDED MASTER LINK ASSEMBLY

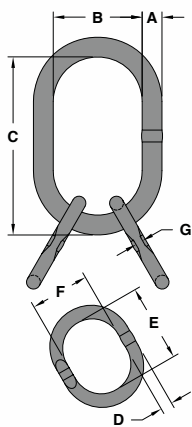

SIZE (mm)	A-347 STOCK NO.	WEIGHT EACH (kg.)	THREE AND FOUR LEG CHAIN SLING (mm)	W.L.L (t)*	DIMENSIONS (mm)							ENGINEERED FLAT SIZE FOR S-1325 (mm)
					A	B	C	D	E	F	G	
13/12	1257692	.82	6	2.4	13.0	60.0	120	12.0	85.0	45.0	6.00	6
17/13	1257762	1.58	7	4.1	17.0	90.0	160	13.0	120	60.0	6.50	7
19/13	1257832	1.80	8	4.3	19.0	90.0	160	13.0	120	60.0	6.50	8
22/20	1257977	3.93	-	8.5	22.0	90.0	170	20.0	150	80.0	-	-
22/17	1257972	3.35	10	6.7	22.0	100	180	17.0	160	90.0	8.50	10
22/16	1257979	3.53	-	5.8	22.0	145	275	16.0	120	60.0	-	-
25/20	1258122	4.65	-	10.7	25.0	100	190	20.0	150	80.0	-	-
25/19	1258102	5.51	-	8.9	25.0	145	275	19.0	160	90.0	-	-
28/22	1258162	6.40	-	12.9	28.0	110	210	22.0	170	90.0	-	-
28/22	1258142	7.17	13	14.5	28.0	145	275	22.0	180	100	10.5	13
31/25	1258182	9.72	16	17.0	31.0	145	275	25.0	210	115	13.5	16
32/25	1258202	9.92	-	17.0	32.0	140	270	25.0	190	100	-	-
36/28	1258222	12.20	-	23.6	36.0	145	275	28.0	190	100	-	-
38/32	1258224	18.23	-	28.1	38.0	140	270	32.0	270	140	-	-
40/31	1258332	18.68	19	28.1	40.0	160	300	31.0	275	145	15.5	-
45/38	1258422	27.96	-	38.3	45.0	170	320	38.0	270	140	-	-
45/36	1258402	26.56	22	38.3	45.0	180	340	36.0	285	155	-	-
50/38	1258442	32.86	-	45.0	50.0	200	380	38.0	270	140	-	-
51/45	1258462	42.92	26	45.0	51.0	190	350	45.0	340	180	-	-
57/50†	1258482	59.70	-	67.0	57.0	203	406	50.0	380	200	-	-

\* Chain slings require that the Minimum Ultimate Load be 4 times the Working Load Limit.

† Forged