


VINE-LINE SPLICES & STAY WIRE

We are able to offer a full range of helical fittings and wiring for orchards, vineyards, trellised crops and crops grown under protection. Trellised crops produce higher yields. A low-cost, long life, field-proven connector can play a major role in keeping trellising, shade net suspension and floppy sprinkler installation's cost low.

- VINE-LINE® Grips can be re-used
- Required no special tools
- VINE-LINE® Grips are tried and tested
- Superior holding capacity
- Superior corrosion resistance
- Product is robust
- Cost effective
- Fast and effective
- Time and labour saving
- Aesthetically pleasing
- Stay is easily re-tensioned and no tools are required for application

VINE-LINE® DOUBLE WRAP GRIP (VDWG)


Designed to terminate and tension wire or strand to an anchor pole used in trellising systems or wood structures. Thereby linking the outer poles of the structure and does away with the need to drill a hole in the pole. Manufactured out of galvanized steel for use on galvanized wire or strand.

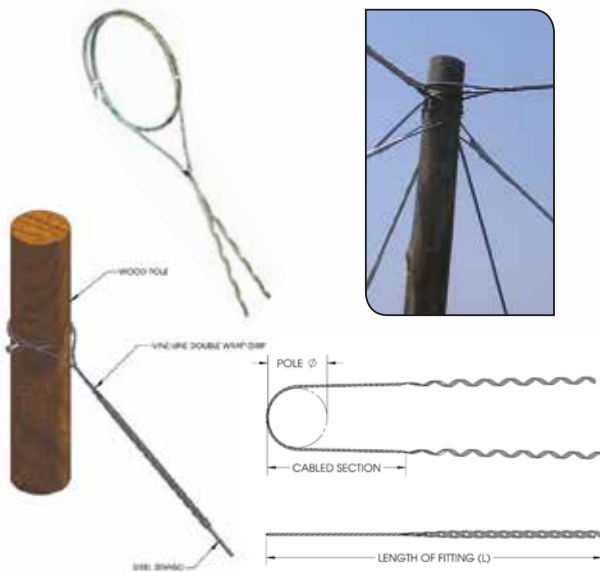

PRODUCT CODE	WIRE OR STRAND	POLE DIAMETER	COLOUR CODE	LENGTH OF FITTING (L) (mm)
VDWG 144 - 75 - 125	7/1.22	75 - 125	BROWN	690
VDWG 157 - 75 - 100	7/1.33	75 - 100	GREEN	610
VDWG 159 - 75 - 100	7/1.35	75 - 100	GREEN	610
VDWG 192 - 75 - 125	7/1.63	75 - 125	YELLOW	660
VDWG 230 - 75 - 125	7/1.95	75 - 125	GREEN	1000
VDWG 240 - 75 - 125	7/2.03	75 - 125	ORANGE	1000
VDWG 312 - 75 - 125	7/2.64	75 - 125	BROWN	780
VDWG 312 - 150 - 175	7/2.64	150 - 175	BROWN	780
VDWG 319 - 75 - 100	7/2.7	75 - 100	BROWN	780
VDWG 396 - 75 - 100	7/3.35	75 - 100	YELLOW	950
VDWG 472 - 75 - 100	7/4.00	75 - 100	GREEN	1044

VINE-LINE® BRACE TIE (VBT)

Designed to secure a wire or strand to an inner wood pole used in trellising systems or wood structure. Does away with the need to drill a hole in the pole. Manufactured out of galvanized steel for use on galvanized wire or strand

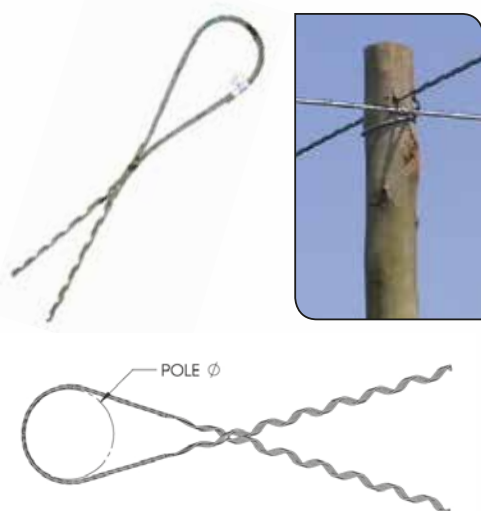

PRODUCT CODE	WIRE OR STRAND	POLE DIAMETER	COLOUR CODE	APPROX. LENGTH OF FITTING (L) (mm)	RATED HOLDING STRENGTH (kg)
VBT 192/75 - 125	7/1.7	75 - 125	YELLOW	425	1090
VBT 240/75 - 125	7/2.03	75 - 125	ORANGE	425	1420
VBT 312/75 - 125	7/2.64	75 - 125	BROWN	470	2430
VBT 396/75 - 125	7/3.35	75 - 125	YELLOW	470	3100
VBT 396/150 - 175	7/3.35	150 - 175	YELLOW	470	3100
VBT 472/100 - 125	7/4.00	100 - 125	YELLOW	550	-

