

CROSBY® SL150 SLIDE-LOC™


CROSBY'S INNOVATIVE ALTERNATIVE TO STANDARD EYE BOLTS

INSTALLATION POSITION

LIFTING POSITION



PATENT
PENDING

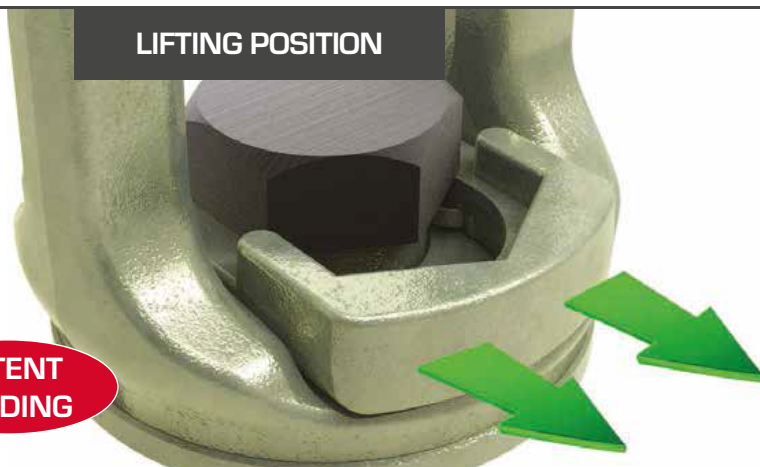

The visible red QUIC-CHECK® mark indicates that the Crosby Slide-Loc® is ready for installation but not for lifting.



When the red QUIC-CHECK® mark is under the slide, the Crosby Slide-Loc® is ready for lifting.

The new Crosby SL150 Slide-Loc® provides features not found on standard lifting eye bolts. At the centre of the new design is the **patent pending locking mechanism** that slides to lock the bolt for faster installation, then slides back to make it ready for lifting — without the need for tools.

- When compared to respective size eye bolts, the Crosby SL150 Slide-Loc®:
 - Has a larger eye opening for easy access
 - Utilizes a bail that swivels 360° to keep load aligned with the sling leg, and maintains full WLL at any angle
- Fatigue Rated® to 20,000 cycles at 1-1/2 times the WLL
- The patent pending locking mechanism provides quicker installation, without the need for tools
- QUIC-CHECK® mark indicates if the Crosby SL150 Slide-Loc® is ready for the lift. Red on the bail indicates the Slide-Loc® bail and bolt are engaged for installation
- Forged alloy steel and Quenched and Tempered bail provides toughness in potentially abusive field conditions
- Meets the Machinery Directive 2006/42/EC guidelines and is marked with CE accordingly
- Capacities from 0.5 to 3.2 metric tons
- Bolt sizes: 10 mm to 24 mm



SWIVELS
360°

Fatigue Rated®

"QT"
QUENCHED & TEMPERED

CE

Load Rated®

QUIC-CHECK®
Q